



## PREMIUM QUALITY SECURITY

Magnetic Door Locks | Push Buttons | Access Controls



For Sales Enquiry:



[info@lokiz.org](mailto:info@lokiz.org)



PREMIUM QUALITY SECURITY

Welcome to **LOKIZ**, your trusted security partner. We provide high-quality electronic magnetic locks and accessories for homes and businesses. Our goal is to offer advanced yet easy-to-use security solutions.

Our products include magnetic locks, smart access systems, keyless entry, and exit buttons. Built for durability and reliability, they are rigorously tested for top performance and simple installation.

At **LOKIZ**, we value trust and long-term relationships. Whether for homes, offices, or industries, our dependable security solutions are designed to last. Explore our range and secure what matters most with **LOKIZ**.

### Our Products



- Magnetic Door Locks – Strong, durable, and available with various brackets.
- Exit & No-Touch Buttons – Traditional and infrared options for easy and hygienic access.
- Access Control – Biometric, RFID, keypad, and Tuya-supported smart access.
- Smart Solutions – Remote control, real-time monitoring, and voice integration.
- Easy Installation – Works with existing systems and includes installation guides.



### LK-M280

#### Single Door Magnetic Lock


|               |   |     |
|---------------|---|-----|
| Holding force | 280kg(600Lbs)                                       |     |
| Input voltage | DC12V or DC24V                                      |     |
| Current       | 12V/480mA; 24V/240mA                                |     |
| Lock signal   | NO  | YES |
| Door signal   | NO  | NO  |
| Weight        | 2kg   |     |
| Suitable for  | Wooden door/Glass door<br>Metal door/Fireproof door |     |

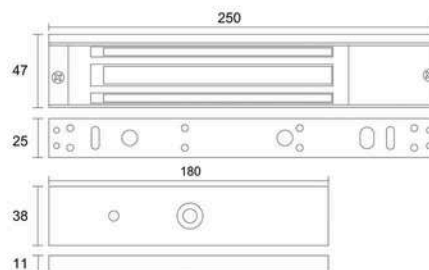

### LK-M280-5T

#### Single Door Magnetic Lock


|               |   |     |
|---------------|---|-----|
| Holding force | 280kg(600Lbs)                                       |     |
| Input voltage | DC12V or DC24V                                      |     |
| Current       | 12V/480mA; 24V/240mA                                |     |
| Lock signal   | YES   | YES |
| Door signal   | YES   | NO  |
| Weight        | 2kg   |     |
| Suitable for  | Wooden door/Glass door<br>Metal door/Fireproof door |     |

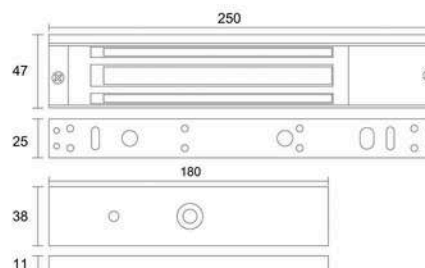

### LK-M280-7T

#### Single Door Magnetic Lock


|               |   |     |
|---------------|---|-----|
| Holding force | 280kg(600Lbs)                                       |     |
| Input voltage | DC12V or DC24V                                      |     |
| Current       | 12V/480mA; 24V/240mA                                |     |
| Lock signal   | YES   | YES |
| Door signal   | YES   | NO  |
| Weight        | 2kg   |     |
| Suitable for  | Wooden door/Glass door<br>Metal door/Fireproof door |     |

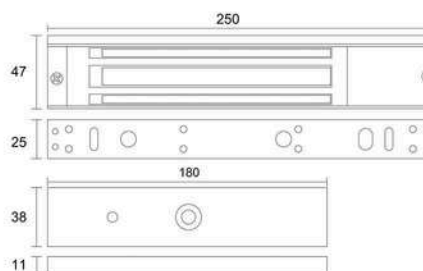

### LK-M280D-5T

#### Double Door Magnetic Lock

|               |   |     |
|---------------|---|-----|
| Holding force | 280kg(600Lbs)*2                                     |     |
| Input voltage | DC12V or DC24V                                      |     |
| Current       | 12V/480mA*2; 24V/240mA*2                            |     |
| Lock signal   | NO  | YES |
| Door signal   | NO  | NO  |
| Weight        | 4kg   |     |
| Suitable for  | Wooden door/Glass door<br>Metal door/Fireproof door |     |

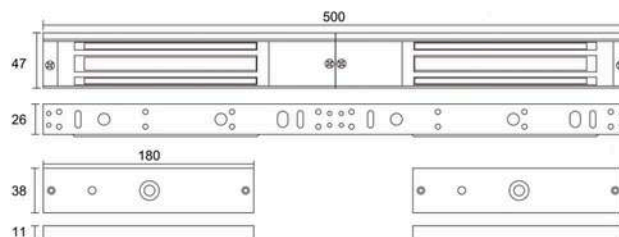




**LK-LZ280**

ZL Brackets for Inward Door


|              |                                 |
|--------------|---------------------------------|
| Material     | High Strength Aluminum Alloy    |
| Opening mode | 90 degree door                  |
| Used for     | L-280 Series                    |
| Weight       | 0.75kg                          |
| Suitable for | Wooden /Metal /Fire doors, etc. |

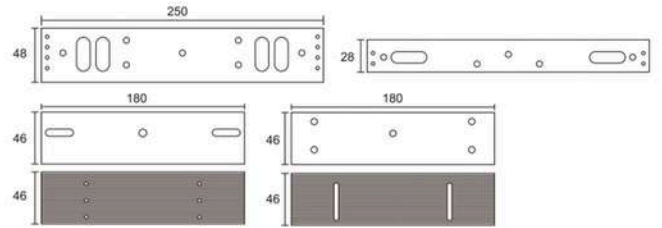

**LK-U280**

Electronic Bolt Lock Bracket U Type


|                 |                              |
|-----------------|------------------------------|
| Material        | High Strength Aluminum Alloy |
| Glass thickness | 8-15mm                       |
| Opening mode    | 90 degree door               |
| Used for        | L-280 Series                 |
| Weight          | 0.3kg                        |
| Suitable for    | Glass door                   |

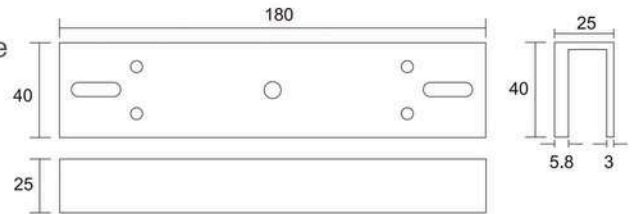

**LK-U280**

Electronic Bolt Lock Bracket U Type


|                 |                              |
|-----------------|------------------------------|
| Material        | High Strength Aluminum Alloy |
| Glass thickness | 8-15mm                       |
| Opening mode    | 90 degree door               |
| Used for        | L-280 Series                 |
| Weight          | 0.3kg                        |
| Suitable for    | Glass door                   |

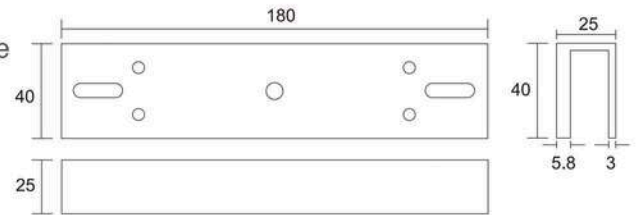

**LK-LZ350**

ZL Brackets for Inward Door

|              |                                 |
|--------------|---------------------------------|
| Material     | High Strength Aluminum Alloy    |
| Opening mode | 90 degree door                  |
| Used for     | L-350 Series                    |
| Weight       | 0.82kg                          |
| Suitable for | Wooden /Metal /Fire doors, etc. |

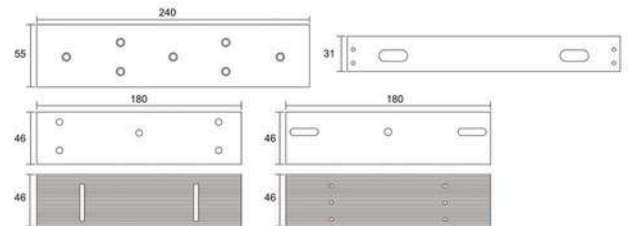




**LK-PBS01**

Zinc Alloy Exit Button


|                 |                                     |        |
|-----------------|-------------------------------------|--------|
| Power Supply    | DC12V                               |        |
| Output Contact  | NO/COM                              |        |
| Material        | Aluminium alloy                     |        |
| Operating Temp  | -20 C ~ +55 C (-4-131F)             |        |
| Weight          | 0.11kg                              | 0.16kg |
| Mechanical Life | 500,000 Tested aging test qualified |        |



**LK-PB03S**

Stainless Steel Exit Button


|                 |                                     |        |
|-----------------|-------------------------------------|--------|
| Power Supply    | DC12V                               |        |
| Output Contact  | NO/COM                              |        |
| Material        | Stainless steel panel               |        |
| Operating Temp  | -20 C ~ +55 C (-4-131F)             |        |
| Weight          | 0.11kg                              | 0.16kg |
| Mechanical Life | 500,000 Tested aging test qualified |        |

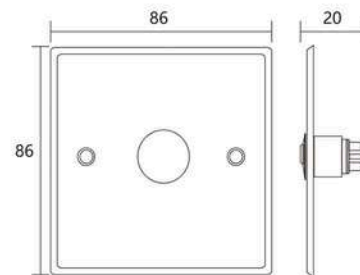

**LK-PB03A**

Aluminum Exit Button


|                 |                                     |        |
|-----------------|-------------------------------------|--------|
| Power Supply    | DC12V                               |        |
| Output Contact  | NO/COM                              |        |
| Material        | Aluminium alloy                     |        |
| Operating Temp  | -20 C ~ +55 C (-4-131F)             |        |
| Weight          | 0.11kg                              | 0.16kg |
| Mechanical Life | 500,000 Tested aging test qualified |        |

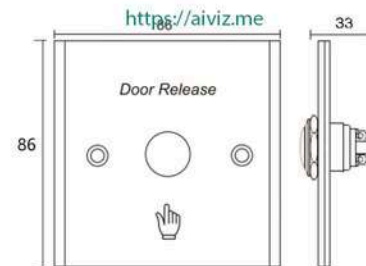

**LK-NT03S**

Touchless Stainless Steel Exit Button


|                 |                                     |        |
|-----------------|-------------------------------------|--------|
| Power Supply    | DC12V                               |        |
| Output Contact  | NO/NC/COM                           |        |
| Material        | Stainless steel panel               |        |
| Operating Temp  | -20 C ~ +55 C (-4-131F)             |        |
| Weight          | 0.11kg                              | 0.16kg |
| Mechanical Life | 500,000 Tested aging test qualified |        |



**LK-NT03S-R**

Touchless Exit Button with Remote


|                 |                                     |        |
|-----------------|-------------------------------------|--------|
| Power Supply    | DC12V                               |        |
| Output Contact  | NO/NC/COM                           |        |
| Material        | Stainless steel panel               |        |
| Operating Temp  | -20 C ~ +55 C (-4-131F)             |        |
| Weight          | 0.11kg                              | 0.16kg |
| Mechanical Life | 500,000 Tested aging test qualified |        |

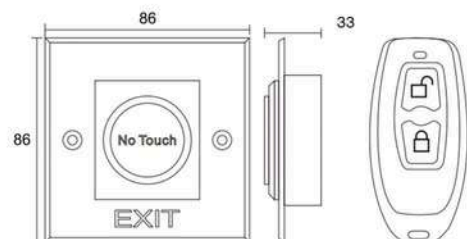




**LK-BG03-G**  
Emergency Break Glass

|                 |                                     |
|-----------------|-------------------------------------|
| Power Supply    | DC12V                               |
| Output Contact  | NO/NC/COM                           |
| Material        | ABS                                 |
| Operating Temp  | -20 C ~ +55 C (-4-131F)             |
| Weight          | 0.16kg                              |
| Mechanical Life | 500,000 Tested aging test qualified |

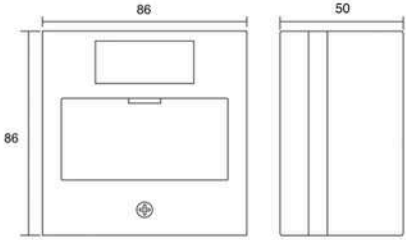

**LK-BG03-GR**  
Resettable Emergency Break Glass

|                 |                                     |
|-----------------|-------------------------------------|
| Power Supply    | DC12V                               |
| Output Contact  | 2NO/2NC/2COM                        |
| Material        | ABS                                 |
| Operating Temp  | -20 C ~ +55 C (-4-131F)             |
| Weight          | 0.16kg                              |
| Mechanical Life | 500,000 Tested aging test qualified |

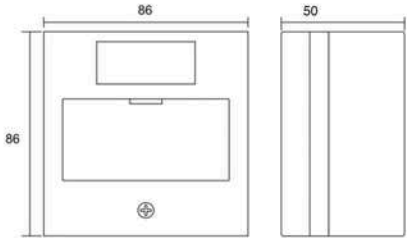




**LK-T01FWiFi**

Fingerprint access Control


|                   |                                    |                  |
|-------------------|------------------------------------|------------------|
| Card Type         | 125KHz ID Card                     | 13.56MHz IC Card |
| Reading distance  | 2-5cm                              | 3-6cm            |
| Power supply      | DC 12-24V                          |                  |
| Material          | Zinc Alloy                         |                  |
| Standby current   | ≤35mA                              |                  |
| User capacity     | 10,000 users , Fingerprint: 256    |                  |
| Waterproof grade  | IP68                               |                  |
| Door open options | Fingerprint, Card, PIN, Card + PIN |                  |



**LK-T02FWiFi**

Fingerprint access Control


|                   |                                    |                  |
|-------------------|------------------------------------|------------------|
| Card Type         | 125KHz ID Card                     | 13.56MHz IC Card |
| Reading distance  | 2-5cm                              | 3-6cm            |
| Power supply      | DC 12-24V                          |                  |
| Material          | Zinc Alloy                         |                  |
| Standby current   | ≤35mA                              |                  |
| User capacity     | 10,000 users , Fingerprint: 256    |                  |
| Waterproof grade  | IP68                               |                  |
| Door open options | Fingerprint, Card, PIN, Card + PIN |                  |



**LK-T02FWiFi**

Fingerprint access Control


|                   |                                    |                  |
|-------------------|------------------------------------|------------------|
| Card Type         | 125KHz ID Card                     | 13.56MHz IC Card |
| Reading distance  | 2-5cm                              | 3-6cm            |
| Power supply      | DC 12-24V                          |                  |
| Material          | Zinc Alloy                         |                  |
| Standby current   | ≤35mA                              |                  |
| User capacity     | 10,000 users , Fingerprint: 256    |                  |
| Waterproof grade  | IP68                               |                  |
| Door open options | Fingerprint, Card, PIN, Card + PIN |                  |





**LK-SL02C-NC**  
Long Type Electric Strike

|                  |                                   |
|------------------|-----------------------------------|
| Lock structure   | Stainless steel precision casting |
| Holding strength | 500KG                             |
| Input voltage    | DC12V±10%                         |
| Current          | 200mA                             |
| Door signal      | YES                               |
| Opening mode     | 90 Degree Swing Door              |
| Weight           | 0.4kg                             |
| Suitable for     | Wooden door, Metal door           |

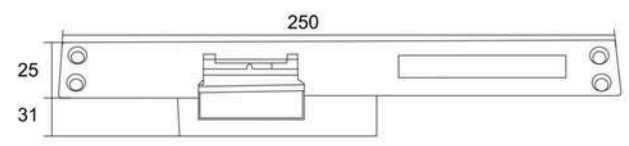

**LK-SL02C-NO**  
Long Type Electric Strike

|                  |                                   |
|------------------|-----------------------------------|
| Lock structure   | Stainless steel precision casting |
| Holding strength | 500KG                             |
| Input voltage    | DC12V±10%                         |
| Current          | 200mA                             |
| Door signal      | YES                               |
| Opening mode     | 90 Degree Swing Door              |
| Weight           | 0.4kg                             |
| Suitable for     | Wooden door, Metal door           |

